




K 055A (12P)

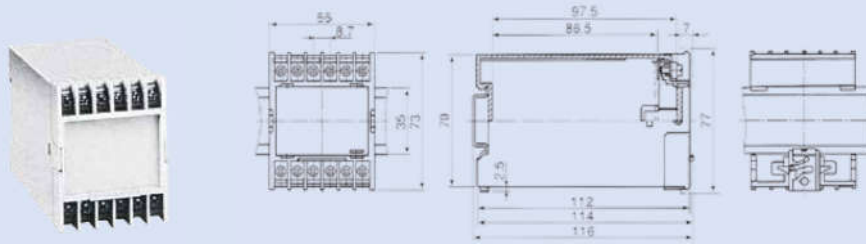


K 075A (16P)

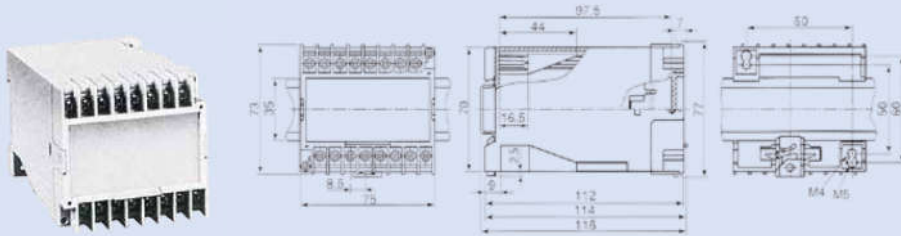


K 100A (20P)

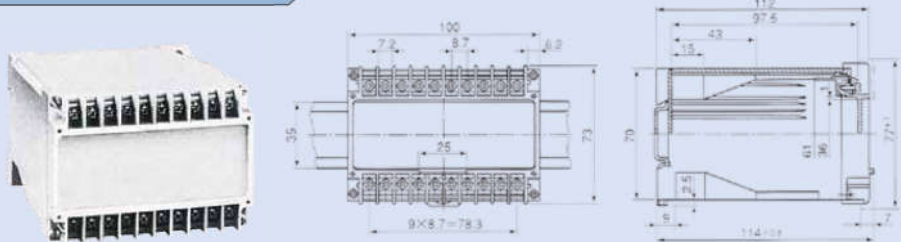


K 150A (32P)

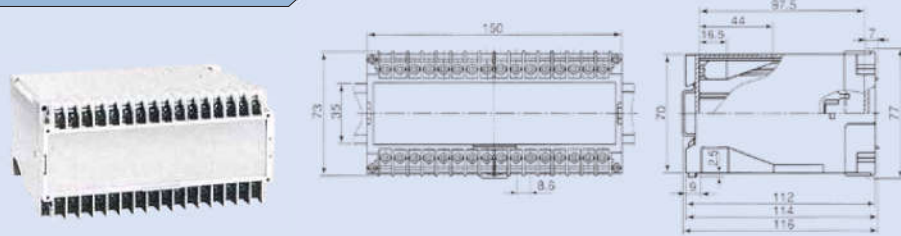


C 032

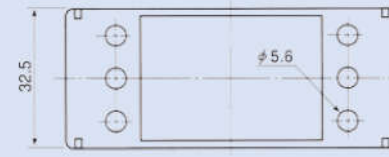


C 047A




C 045C

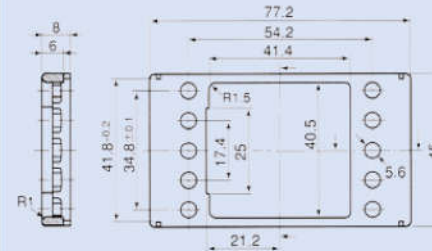


C 055A

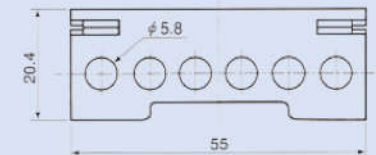


C 075A

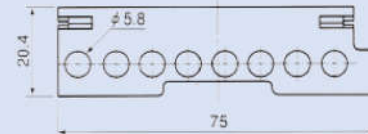

C 100A

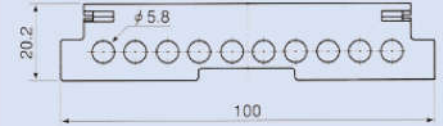

C 150A


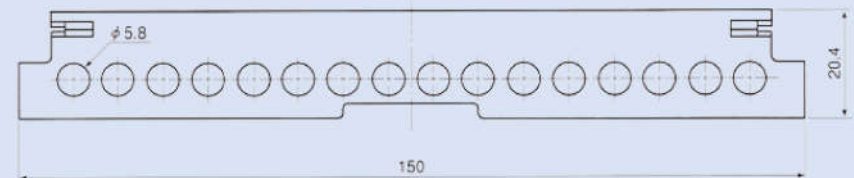


Kシリーズ (2) 4P~16P



■仕様

- 材質 本体 ポリカーボネート
- 端子部 ポリカーボネート
- 使用電圧 300V(Max.)
- 使用電流 16A(Max.)
- 使用温度 110°C(Max.)
- 本体色 ライトグレー
- 端子部色 ライトグレー
- 端子ネジ M3.5



K 404 (4P)





K 406 (6P)



K 408 (8P)



K 416 (16P)




Kシリーズ (3) 8P~64P


■仕様

- 材質 本体 ポリカーボネート
- 端子部 ポリカーボネート
- 使用電圧 300V(Max.)
- 使用電流 10A(Max.)
- 使用温度 110°C(Max.)
- 本体色 ライトグレー
- 端子部色 ライトグレー
- 端子ネジ M3.5



KU 408 (8P)



KU 416 (16P)



KU 432 (32P)



KU 464 (64P)

